



Driven by **PERFORMANCE™**

2025 INDUSTRIAL PRODUCT CATALOG



**PRESSURE WASHERS | MOBILE TRAILERS | GENERATORS & INVERTERS
TRASH PUMPS | AIR COMPRESSORS | INDOOR FLOOR CARE | ACCESSORIES | CRX® ENGINES**

POWERING YOUR WORLD SINCE 1961™

With a legacy spanning over six decades, SIMPSON® has been synonymous with delivering effective solutions. Our commitment to quality, innovation, reliability, and performance has positioned us as a leader in the industry. Each product is a testament to our more than sixty years of unmatched experience, making SIMPSON the go-to choice worldwide.

OUR MISSION

FNA Group aspires to deliver unsurpassed quality products and customer service driven through operational excellence and the dedication of our valued associates.

TABLE OF CONTENTS

COLD WATER PRESSURE WASHERS PG 4

ELECTRIC SERIES
POWERSHOT® SERIES
POWERSHOT® ALUMINUM SERIES
WATER BLASTER® SERIES
WATER SHOTGUN® SERIES
INDUSTRIAL SERIES
RENTAL SERIES
SUPER PRO ROLL CAGE SERIES
TRUCK MOUNT SERIES
SOFT WASH SERIES

HOT WATER PRESSURE WASHERS PG 16

BRUTE SERIES

MOBILE TRAILERS PG 19

COLD WATER
WATER TRAILER
HOT WATER

GENERATORS & INVERTERS PG 23

SPG SERIES
SCGH SERIES
SCGH INDUSTRIAL SERIES
INVERTER SERIES

PORTABLE WATER PUMPS PG 27

WATER PUMP SERIES

COMPRESSOR/WELDER/GENERATOR PG 28

COMPRESSOR/WELDER/GENERATOR

INDOOR FLOOR CARE PG 29

CARPET EXPRESS

ACCESSORIES PG 30

HIGH PERFORMANCE HOSES
PREMIUM ACCESSORIES
PROFESSIONAL CLEANING DETERGENTS
PREMIUM PUMPS & UNLOADER KITS

CRX® ENGINES PG 34

PROFESSIONAL ENGINES

DELCO® PRESSURE WASHERS PG 35

DUAL WASH PRO SERIES – COLD WATER
PATRIOT SERIES – HOT WATER
COBALT SERIES – HOT WATER
STREAMLINER SERIES – HOT WATER
ELIMINATOR SERIES – HOT WATER
VERSA SERIES – HOT WATER
EQUALIZER SERIES – HOT WATER
DOMINATOR SERIES – HOT WATER
CWE SERIES – COLD WATER
MOBILE TRAILER SERIES – HOT WATER



ELECTRIC SERIES

PROFESSIONAL

Designed for ease of use on the job site, the SIMPSON® Electric Series offers simplicity and efficiency. Its compact, lightweight frame makes it easy to transport and maneuver, ensuring quick setup and reliable performance for various cleaning tasks.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Low-pressure soap injector
- Trigger gun

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES	
IS1520012A	61129	1500 PSI	2.0 GPM	1.5HP 120V 1Ø 13A	AAA® Direct	16"	Steel	3/8" x 25', QC	N/A	
RENTAL										
IR1520012A	61094	1500 PSI	2.0 GPM	1.5HP 120V 1Ø 13A	AAA® Direct	16"	Steel	3/8" x 25', QC	8"	
PES2030012B	61130	2000 PSI	3.0 GPM	3HP 230V 1Ø 18.2A	AAA® Direct	36"	Steel	3/8" x 50', QC	13"	
PESAL2030012B	61314	2000 PSI	3.0 GPM	3HP 230V 1Ø 18.2A	AAA® Direct	36"	Aluminum	3/8" x 50', QC	13"	
PES2535012B	61131	2500 PSI	3.5 GPM	5HP 230V 1Ø 24.8A	AAA® Direct	36"	Steel	3/8" x 50', QC	13"	
PESAL2535012B	61315	2500 PSI	3.5 GPM	5HP 230V 1Ø 24.8A	AAA® Direct	36"	Aluminum	3/8" x 50', QC	13"	
PES3040012B	61132	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 30.6A	AAA® Direct	36"	Steel	3/8" x 50', QC	13"	
PESAL3040012B	61316	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 28.5A	AAA® Direct	36"	Aluminum	3/8" x 50', QC	13"	

PUMP

AAA® Industrial Triplex Pump

- Forged brass manifold (61130, 61314, 61131, 61315, 61132, & 61316)
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Integrated unloader (61094 & 61129)
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

FRAMES

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

Steel Frame

- Durable and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium never-flat wheels or pneumatic tires for ease of maneuverability across various terrains

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ELECTRICAL CORD

- 35' long, with GFCI protection

DIMENSIONS & WEIGHTS

61129 L 18" x W 13" x H 17" | 47 lbs.

61094 L 26" x W 22" x H 24" | 87 lbs.

61130, 61314, 61131, 61315 L 48" x W 29" x H 27" | 145 lbs.

61132, 61316 L 48" x W 29" x H 27" | 175 lbs.

POWERSHOT® SERIES

PROFESSIONAL

The SIMPSON® Powershot® Series combines durability and high performance, built for the toughest jobs. Perfectly suited for professionals in industries like deck cleaning, wood restoration, and paint prep, it provides the power and reliability needed for demanding projects.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



60869



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
PS60869 ¹	60869	4000 PSI	3.5 GPM	HONDA® GX270*	AAA® Direct	31"	Steel	3/8" x 50', QC	13"
PS4240 ¹	60456	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	31"	Steel	3/8" x 50', QC	13"
PS60843 ¹	60843	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	31"	Steel	3/8" x 50', QC	13"

PUMP

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Integrated unloader with bypass hose
- Garden-hose inlet/QC outlet

FRAME

Steel Frame

- Durable and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60869	L 38" x W 24" x H 29" 120 lbs.
60456	L 38" x W 24" x H 29" 136 lbs.
60843	L 38" x W 24" x H 29" 138 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

POWERSHOT® ALUMINUM SERIES

PROFESSIONAL

Engineered to meet the needs of cleaning professionals, the SIMPSON® Powershot® Aluminum Series features a lighter aircraft-grade aluminum frame. Ideal for contractors handling heavy-duty cleaning tasks like wood restoration, paint prep, and professional cleaning services, it offers portability without compromising on strength.

UNIT INCLUDES

- Hose
- Nozzles: 0°, 15°, 25°, 40°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



61252



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
ALH3228-S ¹	60735	3400 PSI	2.5 GPM	HONDA® GX200*	CAT PUMPS® Direct	16"	Aluminum	5/16" x 25', QC	10"
ALH3425-S ¹	60689	3600 PSI	2.5 GPM	HONDA® GX200*	AAA® Direct	16"	Aluminum	5/16" x 35', M22	10"
ALH4240 ¹	60688	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS® Direct	31"	Aluminum	5/16" x 25', QC	13"
ALH4440 ¹	61252	4400 PSI	4.0 GPM	CRX® 420*	CAT PUMPS® Direct	31"	Aluminum	5/16" x 25', QC	13"

PUMPS**AAA® Triplex Pump**

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- Integrated & adjustable w/easy-start unloader
- Garden-hose inlet/M22 threaded outlet

CAT PUMPS® Triplex

- Thermal relief valve
- Integrated w/easy-start unloader
- Garden-hose inlet/QC outlet

FRAME**Aircraft-Grade Aluminum Frame**

- Light weight and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- MorFlex® high-pressure hose is non-marring, flexible, and abrasion-resistant with M22 fittings

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.83 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60735	L 21" x W 24" x H 34" 81 lbs.
60689	L 21" x W 24" x H 24" 78 lbs.
60688, 61252	L 38" x W 24" x H 29" 133 lbs.

♦ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

WATER BLASTER® SERIES

PROFESSIONAL/INDUSTRIAL

COLD WATER PRESSURE WASHERS

The SIMPSON® Water Blaster® Series offers a robust solution for professional cleaners, excelling in tasks like deck cleaning, wood restoration, paint preparation, and graffiti removal. Its dual-belt system separates the engine and pump, preventing overheating and pump fatigue, ensuring optimal performance and reliability even in the most challenging environments.



60827

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
PROFESSIONAL									
ALWB4240211 ¹	60827	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	13"
WB4240211 ¹	60205	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Belt	48"	Steel	3/8" x 50', QC	13"
WB4440111 ¹	60824	4400 PSI	4.0 GPM	CRX® 420*	AAA® Belt	48"	Steel	3/8" x 50', QC	13"
ALWB4440111 ¹	60825	4400 PSI	4.0 GPM	CRX® 420*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	13"
INDUSTRIAL									
ALWB4240261 ¹	60828	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS® Belt	48"	Aluminum	3/8" x 50', QC	13"

PUMP

AAA® Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

CAT PUMP® Triplex

- Slow speed
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

Steel Frame

- Durable and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60205, 60824	L 46" x W 26" x H 25" 159 lbs.
60827, 60828	L 46" x W 26" x H 25" 146 lbs.
60825	L 46" x W 26" x H 25" 143 lbs.



EXTERNAL UNLOADER WITH BYPASS HOSE

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

WATER SHOTGUN® SERIES

INDUSTRIAL

Designed for deep cleaning, the Water Shotgun® is ideal for paint preparation, professional cleaning, graffiti removal, industrial sites, and fleet maintenance. Featuring a powerful twin-cylinder engine, it also incorporates a dual-belt system that separates the engine and pump to prevent overheating and pump fatigue, enhancing both efficiency and the lifespan of the engine and pump.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



60243



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
WS5050231E ¹ 2	60243	5000 PSI	5.0 GPM	HONDA® GX690* Key-start	COMET Belt	48"	Steel	3/8" x 50, QC	13"
WS5050131E ¹ 2	61272	5000 PSI	5.0 GPM	CRX® 680* Key-start	COMET Belt	48"	Steel	3/8" x 50, QC	13"

PUMP

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose
- Solid-bronze conrod

FRAME

Steel Frame

- Durable and corrosion resistant

HOSE

- R2 dual steel-braided hose with wrapped-rubber outer jacket and bend protectors

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680*	678cc	6.0 gal. External
HONDA® GX690*	688cc	6.0 gal. External

DIMENSIONS & WEIGHTS

60243	L 49" x W 29" x H 27" 214 lbs.
61272	L 49" x W 29" x H 27" 277 lbs.



Includes 6-gallon external fuel tank

♦ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

² - 12V battery not included.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

INDUSTRIAL SERIES

INDUSTRIAL

COLD WATER PRESSURE WASHERS

The SIMPSON® Industrial Series, a valuable addition to the pressure washer lineup, is tailored for construction, rentals, oil fields, heavy-duty paint prep, and large-scale projects. This series ensures reliable and efficient performance, making it an essential tool for these challenging tasks.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



61026



POWERED by CRX POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	HOSE	FRAME TYPE	TIRES
IS3030212 ¹	61024	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	16"	3/8" x 50', QC	Aluminum	10"
IS3030112 ¹	61279	3000 PSI	3.0 GPM	CRX® 210*	AAA® Direct	16"	3/8" x 50', QC	Aluminum	10"
IS3540212 ¹	61026	3500 PSI	4.0 GPM	HONDA® GX270*	AAA® Direct	31"	3/8" x 50', QC	Aluminum	13"
IS4240231 ¹	61030	4200 PSI	4.0 GPM	HONDA® GX390*	COMET Belt	31"	3/8" x 50', QC	Aluminum	13"
IS4440212 ¹	61028	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	31"	3/8" x 50', QC	Aluminum	13"
IS4440112 ¹	61029	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	31"	3/8" x 50', QC	Aluminum	13"

PUMPS

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium foam-filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHT

61024, 61279	L 32" x W 22" x H 23" 85 lbs.
61026	L 38" x W 23" x H 27" 125 lbs.
61030	L 46" x W 27" x H 26" 180 lbs.
61029	L 38" x W 23" x H 27" 131 lbs.
61028	L 38" x W 23" x H 27" 136 lbs.

¹ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

RENTAL SERIES

INDUSTRIAL

The SIMPSON® Rental Series comes standard with an hour meter, robust water inlet filter, dual braided high-pressure hose with QC fittings, and clear set-up & use instructions on the steel dashboards. Trust in its added durability, courtesy of the heavy-duty aluminum frames.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



61096



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME TYPE	HOSE	TIRES
IR2544211 ¹	61380	2500 PSI	4.4 GPM	HONDA® GX270*	AAA® G-Series Belt	48"	Steel	3/8" x 50', QC	13"
IR2730212 ◊ ¹	61143	2700 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	36"	Aluminum	3/8" x 50', QC	10"
IR3030212 ◊ ¹	61095	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	36"	Aluminum	3/8" x 50', QC	10"
IR3030112 ¹	61282	3000 PSI	3.0 GPM	CRX® 210*	AAA® Direct	36"	Aluminum	3/8" x 50', QC	10"
IR3030211 ¹	61379	3000 PSI	3.0 GPM	HONDA® GX270*	AAA® Belt	48"	Steel	3/8" x 50', QC	13"
IR3035211 ¹	61381	3000 PSI	3.5 GPM	HONDA® GX270*	AAA® G-Series Belt	48"	Steel	3/8" x 50', QC	13"
IR3540212 ◊ ¹	61133	3500 PSI	4.0 GPM	HONDA® GX270*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	13"
IR3538211 ¹	61382	3500 PSI	3.8 GPM	HONDA® GX390*	AAA® G-Series Belt	48"	Steel	3/8" x 50', QC	13"
IR4440212 ◊ ¹	61096	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	13"
IR4440112 ◊ ¹	61134	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	13"

PUMPS

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil drain ports
- Thermal shock resistant ceramic-plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden-hose inlet/QC outlet

FRAMES

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

Steel Frame

- Durable and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium foam-filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINES	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHT

61143	L 30" x W 27" x H 39" 95 lbs.
61095, 61282	L 48" x W 40" x H 24" 213 lbs.
61133, 61134	L 48" x W 40" x H 24" 132 lbs.
61096	L 48" x W 40" x H 24" 139 lbs.
61379	L 46" x W 27" x H 24" 145 lbs.
61380, 61381	L 51" x W 26" x H 24" 163 lbs.
61382	L 51" x W 26" x H 24" 176 lbs.

◊ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

AVAILABLE Q2 2025

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



For more information on how to order, please contact your sales representative.



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FRAME	HOSE	TIRES
IR3030112 ¹	61457	3000 PSI	3.0 GPM	CRX® 210*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR3030212 ¹	61458	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR3030111 ¹	61463	3000 PSI	3.0 GPM	CRX® 210*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"
IR3030211 ¹	61464	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"
IR3540112 ¹	61459	3500 PSI	4.0 GPM	CRX® 420**	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR3540212 ¹	61460	3500 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR3540111 ¹	61465	3500 PSI	4.0 GPM	CRX® 420**	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"
IR3540211 ¹	61466	3500 PSI	4.0 GPM	HONDA® GX390	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"
IR4240112 ¹	61461	4200 PSI	4.0 GPM	CRX® 420*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR4240212 ¹	61462	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	48"	Aluminum	3/8" x 50', QC	10"
IR4240111 ¹	61467	4200 PSI	4.0 GPM	CRX® 420*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"
IR4240211 ¹	61468	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Belt	48"	Aluminum	3/8" x 50', QC	10"

PUMPS

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

FRAMES

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

HOSE

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket

TIRES

- Premium foam-filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINES	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHT

61457, 61458	L 41" x W 19" x H 25" 80 lbs.
61459, 61460, 61461, 61462	L 41" x W 21" x H 27" 115 lbs.
61463, 61464	L 51" x W 26" x H 24" 180 lbs.
61465, 61466, 61467, 61468	L 51" x W 26" x H 24" 145 lbs.

◇ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

SUPER PRO ROLL CAGE SERIES

INDUSTRIAL

Designed for resilience on tough job sites, the SIMPSON® Super Pro Roll Cage machines feature high-quality pumps and engines encased in protective four-wheeled roll cages. These machines ensure stability and facilitate easy transportation across rugged terrains.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



65227



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FUEL TANK CAPACITY	HOSE	TIRES
---------	--------	----------	------	--------	--------------	-------------	--------------------	------	-------

SMALL

SRC3625212 ¹	65200	3600 PSI	2.5 GPM	HONDA® GX200*	AAA® Direct	36"	0.8 gal.	5/16" x 25', QC	10"
SRC3625112 ¹	65202	3600 PSI	2.5 GPM	CRX® 210*	AAA® Direct	36"	0.7 gal.	5/16" x 25', QC	10"

MEDIUM

SRC4035212 ¹	65203	4000 PSI	3.5 GPM	HONDA® GX270*	AAA® Direct	48"	1.4 gal.	3/8" x 50', QC,	10"
SRC4240211 ¹	65209	4200 PSI	4.0 GPM	HONDA® GX390*	AAA® Belt	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440212 ¹	65206	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440112 ¹	65208	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	48"	1.6 gal.	3/8" x 50', QC,	10"
SRC4440111 ¹	65211	4400 PSI	4.0 GPM	CRX® 420*	AAA® Belt	48"	1.6 gal.	3/8" x 50', QC,	10"



For hose reels, see
ACCESSORIES on page 30

◊ - ETL Certified Model.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	SPRAY LANCE	FUEL TANK CAPACITY	NOZZLE	HOSE	TIRES
SRC3080243E ¹ ***	65217	3000 PSI	8.0 GPM	HONDA® GX690*	UDOR® Gear	48"	4.9 gal.	0°, 15°, 25°, and 40°	3/8" x 50', QC	13"
SRC3080143E ***	65236	3000 PSI	8.0 GPM	CRX® 680*	UDOR® Gear	48"	4.9 gal.	0°, 15°, 25°, and 40°	3/8" x 50', QC	13"
SRC3535611E ***	65386	3500 PSI	3.5 GPM	YANMAR L100W Diesel	AAA® G-series Belt	48"	10.0 gal.	15°, 25°, 40°, and Soap	3/8" x 50', QC	13"
SRC4060143E ¹ ***	65219	4000 PSI	6.0 GPM	CRX® 680*	UDOR® Gear	48"	4.9 gal.	15°, 25°, 40°, and Soap	3/8" x 50', QC	13"
SRC4060243E ***	65353	4000 PSI	6.0 GPM	HONDA® GX690*	UDOR® Gear	48"	4.9 gal.	15°, 25°, 40°, and Soap	3/8" x 50', QC	13"
SRC5040141E	65291	5000 PSI	4.0 GPM	CRX® 750*	UDOR® Belt	47"	10.0 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
SRC5050243E ¹ ***	65227	5000 PSI	5.0 GPM	HONDA® GX690*	UDOR® Gear	47"	4.9 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
SRC5050143E ***	65238	5000 PSI	5.0 GPM	CRX® 680*	UDOR® Gear	47"	4.9 gal.	MEG: 15°, 25°, 40°, and Soap	3/8" x 50', NPT	13"
SRC7040143E ***	65237	7000 PSI	4.0 GPM	CRX® 750*	UDOR® Gear	47"	4.9 gal.	MEG: 15°, 25°, and 40°	3/8" x 50', NPT	13"
SRC7040243E ***	65354	7000 PSI	4.0 GPM	HONDA® GX690*	UDOR® Gear	47"	4.9 gal.	MEG: 15°, 25°, and 40°	3/8" x 50', NPT	13"

PUMPS

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil drain ports
- Thermal shock resistant ceramic-plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden-hose inlet/QC outlet

FRAME

Steel Frame

- Durable and corrosion resistant

HOSES

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- Wrapped rubber hoses are dual-braided with 24-inch bend protectors

TIRES

- Premium pneumatic or foam-filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications
- MEG nozzles with 1/4" MNPT connection (only on units 5000 PSI and above)

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 210*	208cc
CRX® 275*	272cc
CRX® 420*	420cc
CRX® 680*	679cc
CRX® 750*	750cc
HONDA® GX200*	196cc
HONDA® GX270*	270cc
HONDA® GX390*	389cc
HONDA® GX690*	688cc
YANMAR L100W	416cc

DIMENSIONS & WEIGHT

65200	L 31" x W 25" x H 29" 150 lbs.
65202	L 31" x W 27" x H 30" 150 lbs.
65203	L 38" x W 28" x H 33" 165 lbs.
65206	L 43" x W 28" x H 35" 179 lbs.
65208, 65211	L 38" x W 28" x H 33" 182 lbs.
65209	L 38" x W 28" x H 33" 194 lbs.
65217, 65236	L 48" x W 40" x H 24" 360 lbs.
65219, 65353	L 46" x W 30" x H 40" 370 lbs.
65227, 65238	L 46" x W 30" x H 40" 381 lbs.
65237, 65354	L 46" x W 30" x H 40" 400 lbs.
65291	L 46" x W 30" x H 40" 365 lbs.
65386	L 47" x W 30" x H 40" 375 lbs.

¹ - ETL Certified Model.

* - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

** - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

*** - Battery not included. Requires 12V garden tractor battery type U1.

TRUCK MOUNT SERIES

INDUSTRIAL

Experience the ease of mobility with SIMPSON®'s truck-mounted pressure washers. Units are designed to be effortlessly transported to any job site. They provide a comprehensive cleaning solution that merges power with convenience. With SIMPSON's pressure washers, your work becomes simpler, more efficient, and you're always prepared for any task!

UNIT INCLUDES

- Nozzles: 15°, 25°, and 40°

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

OPTIONAL ACCESSORY (sold separately and available upon order)

PART #	DESCRIPTION
80294	Two gun system for use with 65251 and 65252 • 6 nozzles: (2) 15°, (2) 25° and (2) 40° • Attachable nozzle-holder bracket • Plumbing hardware for two-hose discharge conversion
80295	Two gun system for use with 65253 and 65254 • 6 nozzles: (2) 15°, (2) 25° and (2) 40° • Attachable nozzle-holder bracket • Plumbing hardware for two-hose discharge conversion



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	BASEPLATE	PRODUCT WEIGHT
---------	--------	----------	------	--------	--------------	-----------	----------------

SMALL

MTM2810143E ¹	65422	2800 PSI	10.0 GPM	CRX® 750* w/Key-start	UDOR® Gear	Stainless Steel	200 lbs.
MTM2810243E ¹	65423	2800 PSI	10.0 GPM	HONDA® GX690* w/Key-start	UDOR® Gear	Stainless Steel	200 lbs.
MTM3050141E ¹	65416	3000 PSI	5.0 GPM	CRX® 420* w/Key-start	UDOR® Belt	Stainless Steel	210 lbs.
MTM3050241E ¹	65417	3000 PSI	5.0 GPM	HONDA® GX390* w/Key-start	UDOR® Belt	Stainless Steel	210 lbs.
MTM3080143E ¹	65420	3000 PSI	8.0 GPM	CRX® 680* w/Key-start	UDOR® Gear	Stainless Steel	200 lbs.
MTM3080243E ¹	65421	3000 PSI	8.0 GPM	HONDA® GX690* w/Key-start	UDOR® Gear	Stainless Steel	200 lbs.

LARGE

TM2810141E ¹	65253	2800 PSI	10.0 GPM	CRX® 750* w/Key-start	UDOR® Belt	Aluminum	260 lbs.
TM2810241E ¹	65254	2800 PSI	10.0 GPM	HONDA® GX690* w/Key-start	UDOR® Belt	Aluminum	260 lbs.
TM3080141E ¹	65251	3000 PSI	8.0 GPM	CRX® 680* w/Key-start	UDOR® Belt	Aluminum	260 lbs.
TM3080241E ¹	65252	3000 PSI	8.0 GPM	HONDA® GX690* w/Key-start	UDOR® Belt	Aluminum	260 lbs.

PUMP

UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

BASEPLATE

Stainless Steel Frame (Small)

- Durable and corrosion resistant
- Rubber feet

Aircraft-Grade Aluminum Frame (Large)

- Light weight and corrosion resistant
- Forklift slots
- Rubber feet

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 420*	420cc
CRX® 680*	679cc
CRX® 750*	679cc
HONDA® GX390*	389cc
HONDA® GX690*	688cc

DIMENSIONS

65251, 65252, 65253, 65254	L 38" x W 25" x H 24"
65416, 65417	L 35" x W 17" x H 22"
65420, 65421, 65422, 65423	L 30" x W 20" x H 22"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
 * - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

SOFT WASH SERIES

INDUSTRIAL

COLD WATER PRESSURE WASHERS

Introducing the all-new SIMPSON® Soft Wash System – the perfect solution for safely and efficiently cleaning delicate exterior surfaces. With up to 300 PSI and up to 12 GPM, it's designed for tasks like cleaning roofs, siding, windows, and hard-to-reach areas. The system uses low-pressure water combined with powerful cleaning solutions to effectively eliminate mold, mildew, moss, bacteria, and other microorganisms, leaving surfaces spotless and ensuring a long-lasting clean.

Select units feature POWER COMMAND™ Technology, an advanced control system that improves efficiency and conserves energy. It automatically shuts off the system when water flow stops, and can be restarted remotely using a key fob from up to 200 feet away.



65427

LIMITED WARRANTY

All Units 10yr Frame, 1yr Pump, 3yr Engine

SPECIAL FEATURES (65445, 65446, 65447 only)

- Remote controlled start/restart feature with up to a 200 ft. range
- Spray-gun trigger-control engine stop
- Electronic start and choke

OPTIONAL ACCESSORY (sold separately and available upon order)

PART #	DESCRIPTION	PART #	DESCRIPTION
80629	Soft Wash Gun	80631	100' Soft Wash Hose
80630	50' Soft Wash Hose	80632	200' Soft Wash Hose



MODEL #	PART #	MAX PRESSURE	MAX FLOW	ENGINE	PUMP DRIVE	BASEPLATE	PRODUCT/PALLET WEIGHT
SW380233E ¹	65426	300 PSI	8.0 GPM	HONDA® GX200* w/Key-Start	COMET BPX25 Direct	Stainless Steel	70 lbs./100 lbs.
SW380133E ¹	65427	300 PSI	8.0 GPM	CRX® 225* w/Key-start	COMET BPX25 Direct	Stainless Steel	70 lbs./100 lbs.
SW310283E ¹	65442	300 PSI	10.0 GPM	HONDA® GX200* w/Recoil	Bertolini 2035 Direct	Stainless Steel	70 lbs./100 lbs.
SW310183E ¹	65443	300 PSI	10.0 GPM	CRX® 225* w/Key-start	Bertolini 2035 Direct	Stainless Steel	70 lbs./100 lbs.
SW312233E ¹	65424	300 PSI	12.0 GPM	HONDA® GX200* w/Key-start	COMET P40 Direct	Stainless Steel	80 lbs./120 lbs.
SW312133E ¹	65425	300 PSI	12.0 GPM	CRX® 225* w/Key-start	COMET P40 Direct	Stainless Steel	80 lbs./120 lbs.
SW312133 ¹	65428	300 PSI	12.0 GPM	HONDA® GX200* w/Recoil	COMET P40 Direct	Stainless Steel	80 lbs./120 lbs.



MODEL #	PART #	MAX PRESSURE	MAX FLOW	ENGINE	PUMP DRIVE	BASEPLATE	PRODUCT/PALLET WEIGHT
SW380133EPC ^{1Δ}	65445	300 PSI	8.0 GPM	CRX® 225* E-start/E-Choke	COMET BPX25 Direct	Stainless Steel	70 lbs./100 lbs.
SW310183EPC ^{1Δ}	65446	300 PSI	10.0 GPM	CRX® 225* E-start/E-Choke	Bertolini 2035 Direct	Stainless Steel	70 lbs./100 lbs.
SW312133EPC ^{1Δ}	65447	300 PSI	12.0 GPM	CRX® 225* E-start/E-Choke	COMET P40 Direct	Stainless Steel	80 lbs./120 lbs.

PUMPS

COMET BPX25 Industrial Diaphragm Pump

- 540 RPM
- 2 cylinder diaphragm pump
- Polypropylene/stainless steel body

COMET P40 Industrial Diaphragm Pump

- 550 RPM
- 3 cylinder diaphragm pump
- Polypropylene/stainless steel body

Bertolini 2035 Industrial Diaphragm Pump

- 650 RPM
- 2 cylinder diaphragm pump
- Polypropylene/stainless steel body

BASEPLATE

Stainless Steel Frame

- Durable and corrosion resistant
- Forklift slots
- Rubber feet

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX200	196cc	0.8 gal.
CRX® 225	224cc	0.7 gal.

DIMENSIONS

All units L 28" x W 17" x H 17"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

Δ - Equipped with POWER COMMAND Technology™

BRUTE SERIES

INDUSTRIAL

Removing heavy grease, oil, salt, and algae can be a tough job but SIMPSON®'s hot water line is up to the task. With sizes ranging from the Mini Brute to the Mega Brute, there's a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Low-pressure soap injector

LIMITED WARRANTY

60363 10yr Frame, 5yr Pump, 1yr Motor

65132, 65133, 65106, 65105, 65108, 65129 10yr Frame, 5yr Pump, 3yr Engine



65106



60363



MODEL #	PART #	PRESSURE	FLOW	ENGINE/MOTOR	PUMP DRIVE	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	TIRES
MINI BRUTE								
MB1518012A ¹	60363	1000 PSI	1.8 GPM	1.5HP 120V 1Ø 19A	AAA® Direct	N/A	4.0 gal. Diesel	13"
KING BRUTE								
KB4040112E ^{1**}	65132	4000 PSI	4.0 GPM	CRX® 420 * Recoil/Key-start	AAA® Direct	1.6 gal. Gasoline	5.0 gal. Diesel	13" & 2 Casters
KB4040252E ^{1**}	65133	4000 PSI	4.0 GPM	HONDA® GX390 * Recoil/Key-start	General Pump® Direct	1.6 gal. Gasoline	5.0 gal. Diesel	13" & 2 Casters
BIG BRUTE								
BB4040332E ^{1**}	65105	4000 PSI	4.0 GPM	VANGUARD® 479cc *Key-Start	COMET Direct	5.0 gal. Gasoline	10.0 gal. Diesel	10"
BB4040232E ^{1**}	65106	4000 PSI	4.0 GPM	HONDA® GX390 * Recoil/Key-start	COMET Direct	5.0 gal. Gasoline	10.0 gal. Diesel	10"
BB4040343E ^{1**}	65108	4000 PSI	4.0 GPM	VANGUARD® 479cc * Key-start	UDOR® Gear	5.0 gal. Gasoline	10.0 gal. Diesel	10"
BB4040132E ^{1**}	65129	4000 PSI	4.0 GPM	CRX® 420 * Recoil/Key-start	COMET Direct	5.0 gal. Gasoline	10.0 gal. Diesel	10"

PUMPS

AAA® Industrial Triplex Pump

- Forged brass manifold
- Ceramic-coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden-hose inlet/QC outlet

General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

Steel Frame

- Durable and corrosion resistant

HOSE

- 3/8" x 50' steel-braided Armor Hose®

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

DIMENSIONS & WEIGHT

60363	L 29" x W 34" x H 40" 277 lbs.
65132, 65133	L 42" x W 28" x H 48" 375 lbs.
65105, 65108	L 42" x W 32" x H 46" 470 lbs.
65106, 65129	L 42" x W 32" x H 46" 450 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

** - Battery not included. Requires 12V garden tractor battery type U1.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- High-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



65110



MODEL #	PART #	PRESSURE	FLOW	ENGINE START	PUMP DRIVE	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	BURNER TYPE
SUPER BRUTE SERIES								
SB355331E ^{1**}	65110	3500 PSI	5.5 GPM	VANGUARD® 570cc* Key-start	COMET Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB355251E ^{1**}	65123	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	General Pump® Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB355131E ^{1**}	65127	3500 PSI	5.5 GPM	CRX® 680* Key-start	COMET Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB355231E ^{1**}	65134	3500 PSI	5.5 GPM	HONDA® GX690* Key-start	COMET Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB355151E ^{1**}	65149	3500 PSI	5.5 GPM	CRX® 680* Key-start	General Pump® Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SBD4060441E ^{1**}	65176	4000 PSI	6.0 GPM	KUBOTA® D902 Diesel*	UDOR® Belt	7.5 gal. Gasoline	7.5 gal. Diesel	12VDC
SB3547241EAC1 ^{1**}	65277	3500 PSI	4.7 GPM	HONDA® GX690* Key-start	UDOR® Belt	7.5 gal. Gasoline	7.5 gal. Diesel	120VAC
SB4040211EAC1 ^{1**}	65278	4000 PSI	4.0 GPM	HONDA® GX690* Key-start	AAA® G-Series Belt	7.5 gal. Gasoline	7.5 gal. Diesel	120VDC

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

Steel Frame

- Durable and corrosion resistant

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

DIMENSIONS & WEIGHT

65110	L 42" x W 46" x H 38" 595 lbs.
65123	L 42" x W 46" x H 38" 625 lbs.
65127, 65149	L 42" x W 46" x H 38" 639 lbs.
65134	L 42" x W 46" x H 38" 663 lbs.
65277, 65278	L 46" x W 45" x H 37" 690 lbs.
65176	L 48" x W 48" x H 45" 1,050 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

** - Battery not included. Requires 12V garden tractor battery type U1.

BRUTE SERIES (CONT.)

INDUSTRIAL

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25° and 40°
- Lance
- Engine oil 10W-30
- Trigger gun
- High-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor



65274



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU/HR	FUEL TYPE	PUMP DRIVE
MEGA BRUTE SERIES							
MB3040011BNG	65270	3000 PSI	4.0 GPM	7.5 HP 230V 1Ø 29A	312,000	Natural Gas	AAA® G-Series Belt
MB3040011BLP	65274	3000 PSI	4.0 GPM	7.5 HP 230V 1Ø 29A	312,000	Liquid Propane	AAA® G-Series Belt
MB3040011GNG	65275	3000 PSI	4.0 GPM	7.5 HP 208V 3Ø 21.4A	312,000	Natural Gas	AAA® G-Series Belt
MB3040011GLP	65276	3000 PSI	4.0 GPM	7.5 HP 208V 3Ø 21.4A	312,000	Liquid Propane	AAA® G-Series Belt

PUMP

AAA® G-Series Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged-brass manifold
- Dual oil-drain ports
- Thermal shock-resistant ceramic-plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden-hose inlet/QC outlet

FRAME

Steel Frame

- Durable and corrosion resistant

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

DIMENSIONS & WEIGHT

All Units L 30" x W 45" x H 42" | 636 lbs.



Control panel and on-board nozzles



Detergent siphon hose, quick-connect and garden-hose connections

COLD WATER

INDUSTRIAL

SIMPSON®'s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.



95000

UNIT INCLUDES

- Hose
- Nozzles: 0°, 15°, 25°, 45°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Low-pressure soap injector

LIMITED WARRANTY

All Units 1yr Frame, 5yr Pump, 3yr Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	TRAILER SIZE	WATER TANK SIZE	HOSE	TIRES
STAGE 1A COLD WATER									
TRSA3228262 ¹	95000	3200 PSI	2.8 GPM	HONDA® GX270*	CAT PUMPS® Direct	8' Overall Length	100 gal.	3/8" x 50', QC	5.30-12
TRSA3228162 ¹	95129	3200 PSI	2.8 GPM	CRX® 225*	CAT PUMPS® Direct	8' Overall Length	100 gal.	3/8" x 50', QC	5.30-12
STAGE 1B COLD WATER									
TRSB3835262 ¹	95001	3800 PSI	3.5 GPM	HONDA® GX270*	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240262 ¹	95002	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240262E ^{1**}	95003	4200 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-start	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240362E ^{1**}	95004	4200 PSI	4.0 GPM	VANGUARD 479cc* w/Key-start	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240162 ¹	95130	4200 PSI	4.0 GPM	CRX® 420*	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12
TRSB4240162E ^{1**}	95134	4200 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-start	CAT PUMPS® Direct	9' Overall Length	150 gal.	3/8" x 100', QC	5.30-12

PUMP

CAT PUMPS® Industrial Triplex

- Thermal relief valve
- Integrated w/easy-start unloader
- Garden-hose inlet/QC outlet

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Axle Rating

- 2000 lbs

Lighting

- LED

Trailer Hitch Ball Size

- 2" Ball

Chemical Pail Holder

- Standard

HOSES

- The Monster hose is a steel-braided, kink-resistant, abrasion-resistant hose featuring quick-connect fittings and a durable polyurethane outer jacket
- Hose Reel: 100'

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 225*	224cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.
VANGUARD® 479cc*	479cc	6.5 gal. remote

DIMENSIONS & WEIGHT

95000, 95129	L 98" (includes tongue) x W 68" x H 47" 750 lbs.
95001, 95002, 95130, 95003, 95134	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95004	L 106" (includes tongue) x W 65" x H 48" 1,000 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

WATER TRAILER

INDUSTRIAL

LIMITED WARRANTY

All Units 1yr Frame, 5yr Pump, 3yr Engine

OPTIONAL ACCESSORIES

Coupling Kits

- **80282** – 2-5/16" adjustable ball coupling kit
- **80283** – 2" adjustable ball coupling kit
- **80285** – Pintle-eye hitch kit

Fire Hose Reel Kit

- **80280** – Includes a heavy duty hose reel, 50' of 1" rubber fire hose, a 1" fire hose nozzle, mounting hardware and plumbing



95414AB
(Shown with 2" ball coupler and optional fire hose reel kit)



SWT TRAILER SERIES – Must Select 2 Options – Add Options Suffixes to Trailer Part # (ex: 95414AB)

MODEL PART #	CONFIGURATION PART #	ENGINE	PUMP	AXLE RATING	TRAILER SIZE	WATER TANK SIZE	BRAKE TYPE
SWT53517ZHSB ¹ 95414XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	535 gal.	Hydraulic
SWT53517ZEB ¹ 95415XX	See Configurations Below	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	535 gal.	Electric

WATER TRAILER CONFIGURATION OPTIONS (For more information on how to order, please contact your sales representative.)

PART #	DESCRIPTION	PART #	DESCRIPTION
95414AA	2" Ball Coupler (80283) Only	95415AA	2" Ball Coupler (80283) Only
95414AB	2" Ball Coupler (80283) & Fire Hose Reel Kit (80280)	95415AB	2" Ball Coupler (80283) & Fire Hose Reel Kit (80280)
95414BA	2-5/16" Ball Coupler (80282) Only	95415BA	2-5/16" Ball Coupler (80282) Only
95414BB	2-5/16" Ball Coupler (80282) & Fire Hose Reel Kit (80280)	95415BB	2-5/16" Ball Coupler (80282) & Fire Hose Reel Kit (80280)
95414CA	Pintle-Eye Hitch Kit (80285) Only	95415CA	Pintle-Eye Hitch Kit (80285) Only
95414CB	Pintle-Eye Hitch Kit (80285) & Fire Hose Reel Kit (80280)	95415CB	Pintle-Eye Hitch Kit (80285) & Fire Hose Reel Kit (80280)

SPECIAL FEATURES

Semi-Trash Pump

- 2" suction and discharge that handles solids up to 9/16" diameter
- Cast-iron impeller and volute
- Silicon-carbide mechanical seals
- Die-cast aluminum pump housing
- Flow: 158 GPM
- Suction head lift: 25'

Plumbing

- Break-away hydrant fill with 25" x 2-1/2" hose
- Dual rear spray heads
- Garden-hose connector
- Manifold discharge system
- Easy-to-operate flow control valves

Water Tank

- Elliptical low profile 3/8-inch thick polyethylene
- 16" manhole with 4-inch vent and sump pump

Trailer

- NATM approved
- 6" C-channel
- 13" under-clearance at axle
- 5000 lb. side-mount crank jack
- Dual-leaf spring suspension
- LED lighting
- Two safety chains with snap hooks

TIRES

- ST225-75R15

ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.

DIMENSIONS & WEIGHT

95414	L 153" (includes tongue) x W 87" x H 84" 2500 lbs.
95415	L 157" (includes tongue) x W 87" x H 84" 2500 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

² - Limited units available.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

HOT WATER

INDUSTRIAL

SIMPSON®'s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Engine oil 10W-30
- Low-pressure soap injector

LIMITED WARRANTY

All Units 1yr Trailer Frame, 5yr Pump, 3yr Engine



95005



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	TRAILER SIZE	AXLE RATING	WATER TANK SIZE	TIRE SPEC
---------	--------	----------	------	--------	------	--------------	-------------	-----------------	-----------

STAGE 1C HOT WATER

TRSC4040232E ¹	95005	4000 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13
TRSC4040332E ¹	95006	4000 PSI	4.0 GPM	VANGUARD® 479cc* w/Recoil & Key-start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13
TRSC4040132E ¹	95016	4000 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13

STAGE 2 HOT WATER

TRS23555251E ¹	95123	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-start	General Pump®	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14
TRS23555151E ¹	95131	3500 PSI	5.5 GPM	CRX® 680* w/Key-start	General Pump®	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14

STAGE 3 HOT WATER

TRS33555231E ¹	95122	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-start	COMET	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555251E ¹	95124	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-start	General Pump®	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555131E ¹	95132	3500 PSI	5.5 GPM	CRX® 680* w/Key-start	COMET	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555151E ¹	95138	3500 PSI	5.5 GPM	CRX® 680* w/Key-start	General Pump®	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16

MINI BRUTE TRAILER

MBT4040252E ¹	95014	4000 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-start	General Pump®	10' Overall Length	3500 lbs.	N/A	ST175/80R13
MBT4040152E ¹	95136	4000 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-start	General Pump®	10' Overall Length	3500 lbs.	N/A	ST175/80R13

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

PUMPS

COMET Industrial Triplex

- 1750 RPM slow speed (Stage 2 and 3)
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

General Pump® Industrial Triplex

- 1750 RPM slow speed (Stage 2 and 3)
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose to tank

HOSES

Steel-braided Armor Hose®

- Sizes:
 - 3/8" x 50' – **95136, Mini Brute Trailers**
 - 3/8" x 100' – **Stage 1Cs 2s, and 3s trailers**

Supply Hose

- Sizes:
 - 3/8" x 75' – **Stage 1C**
 - 3/8" x 90' – **Stage 2s, 3s, and Mini Brute Trailers**

High-Pressure Hose Reel

- Sizes:
 - 100' – **Stage 1Cs**
 - 200' – **Stage 2s, 3s**; optional for **Mini Brute Trailers**
 - N/A – **95400**

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Lighting

- LED

Trailer Hitch Ball Size

- 2" ball for stage 1C, 2 and Mini Brute trailers
- 2-5/16" ball for stage 3 trailers



For hose reels, see
ACCESSORIES on page 30

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
Only for the Stage 1C, 2, and 3 trailers		
CRX® 420*	420cc	7.5 gal. Remote
CRX® 680*	679cc	7.5 gal. Remote
HONDA® GX390*	389cc	7.5 gal. Remote
HONDA® GX690	688cc	7.5 gal. Remote
*VANGUARD 479cc	479cc	7.5 gal. Remote

DIMENSIONS & WEIGHT

95005, 95006, 95016	L 108" (includes tongue) x W 68" x H 69" 1300 lbs.
95123, 95131	L 156" (includes tongue) W 68" x H 62" 1500 lbs.
95124, 95122, 95132, 95138	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95014, 95136	L 121" (includes tongue) x W 48" x H 39" 900 lbs.



95122



95014

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

SPG SERIES

PROFESSIONAL

Boasting a larger size, enhanced durability, and the ability to generate a superior power output compared to inverter generators, SIMPSON® Commercial generators are the ideal choice for energizing job sites. They also serve as a reliable source of backup electricity during power outages, ensuring uninterrupted power supply when you need it most.

LIMITED WARRANTY

All Units 3yr Residential, 6m Commercial



70069



MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS [±]	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M ⁺
SPG3645 ¹	70069	CRX® 225*	4500	3600	120V	60 Hz	26A	Automatic	8" Never-flat	10.5 Hours	72-75
SPG5568 ¹	70070	CRX® 420*	6875	5500	120/240V	60 Hz	21A	Automatic	10" Never-flat	9.5 Hours	74-77
SPG7593E ¹	70072	CRX® 420*	9375	7500	120/240V	60 Hz	27A	Automatic	10" Never-flat	9 Hours	74-77
SPG8310E ¹	70073	CRX® 460*	10000	8300	120/240V	60 Hz	30A	Automatic	10" Never-flat	9 Hours	74-77

ADDITIONAL SPECS

All Units

- Low-oil shutdown
- GFCI protection

70070

- Equipped with Safe-T-Sense CO monitor

70072, 70073

- Battery not included; requires 12V-14AH battery

ENGINES LOW OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70069	CRX® 225*	224cc	Recoil	3.9 gal. Gasoline
70070	CRX® 420*	420cc	Recoil	6.6 gal. Gasoline
70072	CRX® 420*	420cc	Recoil/Key-start	6.6 gal. Gasoline
70073	CRX® 460*	439cc	Recoil/Key-start	6.6 gal. Gasoline

DIMENSIONS & WEIGHT

70069	L 23" x W 18" x H 19" 110 lbs.
70070, 70072	L 27" x W 21" x H 23" 174 lbs.
70073	L 27" x W 21" x H 23" 207 lbs.

GENERATOR PANEL CONFIGURATIONS[±]



70069



70070



70072



70073

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

[±] - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

⁺ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

SCGH SERIES

INDUSTRIAL

With their impressive size, increased durability, and superior power output that outperforms inverter generators, SIMPSON® industrial generators are the perfect solution for powering up job sites. They also act as a dependable backup electricity source during power outages, guaranteeing a continuous power supply when it's crucial. Experience the reliability and power of SIMPSON Industrial generators when you need it the most.

LIMITED WARRANTY

All Units 5yr Commercial

SPECIAL FEATURES

- Heavy-duty welded steel frame with powder-coated finish
- Welded lifting handle
- Premium HONDA® engines
- Lifting hook
- V-mount vibration isolation system
- Auto idle down
- UL listed receptacles
- Weather resistant outlet covers
- Easily accessible control panel
- High-quality 100% copper-wound brushless alternator
- Premium never-flat wheels



70054



MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME- 25% LOAD	dBA-25% LOAD @ 7M +
SCGH5500 ¹²	70053	HONDA® GX270*	5500	4500	120V/240V	60 Hz	17.5A	Capacitor	10" Foam Filled	17 Hours	72
SCGH8500 ¹²	70054	HONDA® GX390*	8500	7000	120V/240V	60 Hz	30A	Capacitor	10" Foam Filled	12 Hours	74
SCGH8500E ¹²	70055	HONDA® GX390*	8500	7000	120/240V	60 Hz	30A	Capacitor	10" Foam Filled	12 Hours	74

ADDITIONAL SPECS

All Units

- Low-oil shutdown
- GFCI protection

70055

- 12V battery included

CIRCUIT BREAKERS

70053	70054, 70055
(1) 15A Main Circuit Breaker, Double Pole	(1) 30A Main Circuit Breaker, Double Pole
	(2) 20A Thermal Circuit Breakers, Single Pole



ENGINES LOW OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70053	HONDA® GX270*	270cc	Recoil	7.9 gal.
70054	HONDA® GX390*	389cc	Recoil	7.9 gal.
70055	HONDA® GX390*	389cc	Recoil/Key-start	7.9 gal.

DIMENSIONS & WEIGHT

70053	L 30.25" x W 25" x H 27" 151 lbs.
70054	L 30.25" x W 25" x H 27" 175 lbs.
70055	L 30.25" x W 25" x H 27" 182 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

² - Wheels Standard

± - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.



70098



MODEL #	PART#	ENGINE	STARTING WATTS	RUNNING WATTS ²	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M ⁺
SCGHD4800E ¹	70099	YANMAR L100W Diesel	4200	4800	120V/240V	60Hz	17.5A	Capacitor	12 Hours	74
SCGH10000E ¹	70098	HONDA® GX630*	10,000	9,000	120V/240V	60Hz	43A	Capacitor	22.5 Hours	73

ADDITIONAL SPECS

- Low-oil shutdown
- GFCI protection
- CSA certified

ENGINES LOW-OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70098	HONDA® GX630	688cc	Key-start	9.0 gal.
70099	YANMAR L100W	416cc	Key-start	8.0 gal.

DIMENSIONS & WEIGHT

70098, 70099 L 40" x W 25" x H 31" | 400 lbs.


OPTIONAL ACCESSORIES

80298 - Handle and wheel kit (for models 70098, 70099)

CIRCUIT BREAKERS

70098, 70099 (1) 43A Main Circuit Breaker, Double Pole (2) 20A Thermal Circuit Breakers, Single Pole (3) 30A Thermal Circuit Breakers, Single Pole

70098, 70099

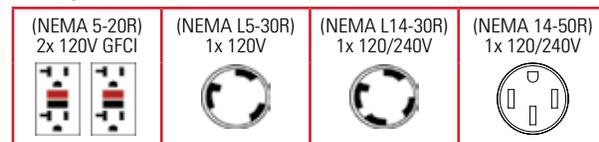

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

² - Wheels Standard

[±] - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

⁺ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M).

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

INVERTER SERIES

PROFESSIONAL

Designed to be smaller, lighter, quieter, and provide a more stable power supply than a conventional generator, our inverter generators is the perfect way to power a tailgate party, or run sensitive electronic devices like TVs and computers while camping.

EQUIPPED WITH GFCI PROTECTION!



70061

POWERED by
CRX

MODEL #	PART #	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	OVERLOAD AMPERAGE	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M+	OUTLET TYPE
SIG2218 ¹	70061	2200	1800	120V	60 Hz	15A MAX	10 Hour	53	120V Duplex (5-20R) GFCI, 12V DC Automotive

ENGINE LOW OIL SENSITIVE

PART #	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70061	CRX®	79cc	Recoil	1.1 gal. Gasoline

DIMENSIONS & WEIGHT

70061 L 20" x W 12" x H 18" | 46 lbs.

PARALLEL BOX ACCESSORY

For use with SIG2218 only

MODEL #	PART #	AMPS
SIG22PK	80442	30A

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators.

Inverter generators and parallel box sold separately.



80442

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

WATER PUMP SERIES

PROFESSIONAL

PORTABLE WATER PUMPS

Engineered to handle water containing mud, sand, leaves, twigs, and other contaminants, SIMPSON®'s water pumps are perfect for clearing wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's water pumps will get the job done no matter where you need them.

PORTABLE



71007

POWERED by
CRX

UNIT INCLUDES

71007 (71007S)	2" plastic strainer, 1x wire clamp
71009 (71009S)	Hose barb, 1x straight & 1x 90°
71010 (71010S)	3" plastic strainer, 1x wire clamp

LIMITED WARRANTY

All Units	3yr
------------------	-----

MODEL #	PART #	PUMP	ENGINE	START	FLOW	INLET/OUTLET DIAMETER	FUEL TANK CAPACITY	SUCTION HEAD LIFT	TOTAL HEAD LIFT
SSTP71007(-S) ¹	71007 (71007S)	2" Semi-Trash	CRX® 210*	Recoil	158 GPM	2"	0.7 gal.	25'	98'
SCP71009(-S) ¹	71009 (71009S)	2" Chemical	CRX® 210*	Recoil	195 GPM	2"	0.7 gal.	25'	98'
STP71010(-S) ¹	71010 (71010S)	3" Trash	CRX® 210*	Recoil	285 GPM	3"	0.7 gal.	25'	75'

PUMPS

2" Semi-Trash Pump

- Die-cast aluminum pump housing
- Easy-access quick clean out
- Silicon-carbide mechanical seal
- Cast-iron impeller and volute
- Debris up to 9/16"

2" Chemical Pump

- Fiber-reinforced polymer pump housing
- Easy-access quick clean out
- Ceramic-carbide mechanical seal
- Fiber-reinforced polymer impeller and volute

3" Trash Pump

- Die-cast aluminum pump housing
- Easy-access quick clean out
- Silicon-carbide mechanical seal
- Cast-iron impeller and volute
- Debris up to 1-1/5"

FRAME

Steel Frame (71007 (71007S), 71010 (71010S) only)

- Durable and corrosion resistant

ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	0.7 gal.

DIMENSIONS & WEIGHT

71007 (71007S)	L 20" x W 18" x H 20" 65 lbs.
71009 (71009S)	L 20" x W 17" x H 16" 43 lbs.
71010 (71010S)	L 23" x W 20" x H 22" 79 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

(-S) - Indicates shippable packaging

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

COMPRESSOR/WELDER/GENERATOR

PROFESSIONAL

The SIMPSON® Compressor/Welder/Generator offers versatility for job sites, service trucks, or emergencies. It features a 16 CFM compressor, 5,000-watt generator, 240-Amp welder, and a reliable CRX® 420 engine for dependable, professional-grade performance.

LIMITED WARRANTY

73001 1yr

SPECIAL FEATURES

- Heavy-duty 2-stage cast iron pump
- Bearings on both ends of pump crank shaft
- Needle bearings at wrist pin on pump
- Industrial-grade electric start drive engine
- Pilot valve for continuous operation
- Fully enclosed belt guard
- Full-saddle mounting feet
- Alternator on drive engine
- 120/220V outlets
- Stainless steel flex air lines
- Vibration isolation mounts
- Belt tension mount for all drive belts



MODEL #	PART #	ENGINE	DRIVE	COMPRESSOR PERFORMANCE	COMPRESSOR TANK CAPACITY	WELDER AMPERAGE	GENERATOR OUTPUT	GENERATOR VOLTAGE	GENERATOR AMPERAGE
CWG16C240A5KW ¹	73001	CRX 420* w/Key-Start	Belt	16 CFM @ 175 PS	30 gal.	240A DC	5000 WATTS	240A DC	41A (@ 120V) 20A (@ 240V)

ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.

DIMENSIONS & WEIGHT

71003 L 44" x W 24" x H 40" | 450 lbs.

73001

(NEMA 5-20R) 2x 120V GFCI	(NEMA L14-30R) 1x 120/240V

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

CARPET EXPRESS

PROFESSIONAL

INDOOR FLOOR CARE

The SIMPSON® Carpet Express® combines exceptional cleaning power with advanced Quick Dry technology for outstanding results and rapid drying. It effectively tackles deeply embedded dirt, tough stains, and odors, making it ideal for both high-traffic areas and everyday use.

LIMITED WARRANTY

All Units 1yr

OPTIONAL ACCESSORIES & CLEANING DETERGENTS

PART #	DESCRIPTION	CASE PACK PART #	QUANTITY
80595	Extraction Hand Tool Kit	N/A	N/A
80557	SpotVortex Tool	80640	6
80600	24 oz. SpotVortex Spot Spray	80567	12
80638	24 oz. Spot & Odor Pet Spray	80589	12
80636	24 oz. 7-in-1 High Traffic Spray	80574	12
80605	32 oz. 7-in-1 Carpet Care Pet Formula	80573	12
80606	64 oz. 7-in-1 Carpet Care Pet Formula	80572	8
80604	128 oz. 7-in-1 Carpet Care Pet Formula	80571	4
80637	32 oz. 7-in-1 Carpet Care Pro Formula	80585	12
80608	64 oz. 7-in-1 Carpet Care Pro Formula	80586	8
80607	128 oz. 7-in-1 Carpet Care Pro Formula	80587	4



31002SIM



PART #	PRESSURE	FLOW	RECOVERY TANK CAPACITY	DETERGENT TANK CAPACITY	BRUSH MOTOR	VACUUM MOTOR
31002SIM	35 PSI	0.85 GPM	4.0 gal.	4.0 gal.	2500 RPM Permanent Magnate DC	Ametek High-Performance 2-Stage

SPECIAL FEATURES

- Heavy-duty 2-stage cast iron pump
- Bearings on both ends of pump crank shaft
- Needle bearings at wrist pin on pump
- Industrial-grade electric start drive engine
- Pilot valve for continuous operation
- Fully enclosed belt guard
- Full-saddle mounting feet
- Alternator on drive engine
- 120/220V outlets
- Stainless steel flex air lines
- Vibration isolation mounts
- Belt tension mount for all drive belts

DIMENSIONS & WEIGHT

31002SIM L 20" x W 12" x H 25" | 46 lbs.



HIGH-PERFORMANCE HOSES

M22 ADAPTER INCLUDED
WITH MORFLEX® HOSES

Used to connect multiple hoses with standard M22 connections



MORFLEX® HOSE SERIES



Engineered for maximum flexibility and kink resistance, this hose features a durable, non-marring, and abrasion-resistant polyurethane jacket. It includes 4-inch bend protectors for added durability and is compatible with most gas and electric pressure washers up to 3,700 PSI, thanks to its standard M22 threaded connections.



Max Temp: 140° F

Inner Material: Polyester

Outer Material: Polyurethane w/4" Bend Protectors

Fittings: M22 x M22

Terminated: N/A

MONSTER HOSE SERIES



Designed for cold water up to 140°F, this hose features a dual-braided steel over polyester construction for durability. Its flexible, non-marring, translucent polyurethane jacket is thrice as abrasion-resistant as rubber. Withstanding up to 4500 PSI, it fits most pressure washers with 3/8" quick connect fittings.



Max Temp: 140° F

Inner Material: Polyester & Steel-braided

Outer Material: Polyurethane w/4" Bend Protectors

Fittings: Brass QC Socket x Steel QC Plug

Terminated:

41113, 41030 – Steel Solid MNPT x Steel Solid MNPT

41028 – Brass Solid QC Socket x Steel Solid QC Plug

ARMOR HOSE® SERIES



Built for high-temperature applications up to 250°F, boasts a durable dual-braided steel over polyester construction. Its flexible, non-marring, opaque polyurethane jacket is abrasion-resistant. Compatible with hot and cold water, it fits most commercial gas pressure washers with 3/8" quick connect fittings, handling up to 4500 PSI.



Max Temp: 250° F

Inner Material: Polyester & Steel-braided

Outer Material: Polyurethane w/4" Bend Protectors

Fittings: Brass QC Socket x Steel QC Plug

Terminated: Steel Solid MNPT x Steel Solid MNPT

WRAPPED RUBBER HOSE SERIES

Designed for industrial and commercial use, this heavy-duty hose features single or dual-braided technology with a wrapped rubber outer jacket and bend protectors for longevity. Rated for temperatures up to 250°F and pressures from 4,500 to 10,000 PSI, it's compatible with 3/8" quick connect pressure washers.



Max Temp: 250° F

Inner Material:

41183 – R1 Steel-braided

All Others – R2 Steel-braided

Outer Material:

41183 – Wrapped Rubber w/6" Bend Protectors

All Others – Wrapped Rubber w/24" Bend Protectors

Fittings:

41183 – Brass QC Socket x Steel QC Plug

All Others – SS QC Socket x SS QC Plug

Terminated: Steel 3/8" Rigid MNPT x
Steel 3/8" Swivel MNPT

SOFT WASH HOSE SERIES



SIMPSON® Soft Wash hoses are expertly engineered for compatibility with the Soft Wash and Dual Wash series pressure washers. Constructed from high-quality, durable PVC, these hoses offer exceptional resistance to chemicals and corrosion, ensuring reliable performance and long-lasting durability.



Max Temp: 140° F

Max PSI: 300

Material: PVC

Fittings: 1/2" MNPT and ferrule

PART #	PRESSURE	ID x LENGTH
40224 ⁴	3300 PSI	1/4" x 25'
40225 ⁴	3700 PSI	5/16" x 25'
40226 ⁴	3700 PSI	5/16" x 25'

PART #	PRESSURE	ID x LENGTH
41113	4500 PSI	3/8" x 25'
41028 ⁴	4500 PSI	3/8" x 50'
41030	4500 PSI	3/8" x 100'
41032	4500 PSI	3/8" x 150'
41034	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41114 (41095) ⁴	4500 PSI	3/8" x 50'
41096	4500 PSI	3/8" x 100'
41115	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41183	4500 PSI	3/8" x 50'
41184	8000 PSI	3/8" x 50'
41185	8000 PSI	3/8" x 100'
41186	8000 PSI	3/8" x 200'
41187	10,000 PSI	3/8" x 50'
41188	10,000 PSI	3/8" x 100'
41189	10,000 PSI	3/8" x 200'
41190	10,000 PSI	1/2" x 50'
41191	10,000 PSI	1/2" x 100'
41192	10,000 PSI	1/2" x 200'

PART #	PRESSURE	ID x LENGTH
80630	350 PSI	1/2" x 50'
80631	350 PSI	1/2" x 100'
80632	350 PSI	1/2" x 200'

LIMITED WARRANTY

All Hoses 90-day

⁴ - Shipped in retail packaging

PREMIUM ACCESSORIES



DESCRIPTION	PART #	PRESSURE	FLOW	MAX TEMP	INLET CONNECTION	OUTLET CONNECTION
Front-Load Trigger Gun	80147	3400 PSI	8.0 GPM	140° F	M22 Male Hose Connect	M22 Female
360° Swivel Side-Assist Trigger Gun	80148	4500 PSI	6.6 GPM	140° F	M22 Male Hose Connect with Included Female M22 x QC Plug Adapter	M22 Female
Hot-Water Trigger Gun	80178	5075 PSI	12.0 GPM	212° F	3/8" FNPT Hose Connect with Included 3/8" MNPT x M22 Male, & 3/8" MNPT x QC Plug adapters	1/4" FNPT
Wash Down Trigger Gun	80629	350 PSI	16.0 GPM	140° F	1/2" BSPP(M) Hose Connect	N.A
16" Spray Wand	80149	3600 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect
31" Spray Wand	80479	4500 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect
48" Insulated Wand	80179	5075 PSI	N/A	212° F	1/4" MNPT Spray Gun Connect	1/4" QC Socket Nozzle Connect
18' Telescoping Wand	80470	4000 PSI	N/A	140° F	3/8" QC Plug Spray Gun Connect	1/4" QC Socket Nozzle Connect



DIAL-N-WASH

PART #: 82232
Max Pressure: 4500 PSI
Max Flow: 4.0 GPM
Max Temp: 140° F
Inlet - Spray Gun Connect: M22 Male
Outlet - Lance Connect: M22 Female



O-RING & FILTER KIT

PART #: 80151
Two Filters: (2) 25.0mm OD
Two O-ring Sets: (2) 18.0mm OD, (2) 15.0mm OD, (2) 15.6mm OD, (2) 14.0mm OD, (2) 14.0mm OD



FOAM CANNON

PART #: 80271
Min Pressure: 1600 PSI
Max Pressure: 4000 PSI
Max Temp: 140° F
Lance Connect: 1/4" QC Plug

NOZZLES

DESCRIPTION	PART #	PRESSURE	MAX TEMP	NOZZLE SIZE	LANCE CONNECTION
5-Pack: 0°, 15°, 25°, 40° and Soap	80145	3600 PSI	212° F	3.0, Soap	1/4" QC Plug
5-Pack: 0°, 15°, 25°, 40° and Soap	80146	4500 PSI	212° F	4.0, Soap	1/4" QC Plug
2nd Story: Wash and Soap	80177	5000 PSI	212° F	10.0, 40.0	1/4" QC Plug
5-N-1: 0°, 15°, 25°, 40° and Soap	80142	3600 PSI	140° F	2.8-3.2, Soap	1/4" QC Plug
Turbo	80143	3600 PSI	212° F	3.0	1/4" QC Plug
Turbo	80144	4500 PSI	212° F	4.0	1/4" QC Plug



DESCRIPTION	PART #	CONTENT AMOUNT
15w40 Pump Oil	80138	16oz
Pump Guard - Aerosol	80273	4oz



PREMIUM ACCESSORIES (CONT.)

HOSE REELS

DESCRIPTION	PART #	PRESSURE	MAX TEMP	HOSE CAPACITY
Manual Hose Reel – 100'	80399	5000 PSI	212° F	100' x 3/8"
Manual Hose Reel 100' or 125'	80490	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'
Manual Hose Reel – 200'	80403	5000 PSI	212° F	3/8" x 200'
Portable Hose Reel 100' or 125'	80401	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'

PORTABLE



SURFACE CLEANERS

DESCRIPTION	PART #	MAX FLOW	MAX PRESSURE	MAX TEMP	CONNECTION	MATERIAL	FILTER
15" Surface Cleaner	80165	3.4 GPM	3700 PSI	140° F	1/4" QC Plug Inlet Lance Connect	Powder Coated Steel	N/A
20" Commercial Surface Cleaner w/Handle	80182	3.8 GPM	4500 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Heavy-duty ABS	High-Pressure Inlet
16.5" Surface Cleaner	80625	4.0 GPM	4000 PSI	140° F	1/4" QC Plug Inlet Lance Connect	Stainless Steel	High-Pressure Inlet
18" Surface Cleaner ★	80494	4.0 GPM	4000 PSI	212° F	1/4" QC Plug Inlet Hose Connect	Stainless Steel	High-Pressure Inlet
24" Surface Cleaner w/Handles ★	80495	4.0 GPM	3750 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Stainless Steel	N/A
24" Surface Cleaner w/Reclaim & Handles ★	80496	4.0 GPM	4500 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Stainless Steel	N/A



PROFESSIONAL CLEANING DETERGENTS

VITAL OXIDE

Vital Oxide is an EPA-registered disinfectant that kills mold, eliminates odors, and is ready-to-use, safe, and non-corrosive.

VITAL OXIDE IN ACTION

- Used in emergency response to eliminate Norovirus outbreaks
- Clinical trials have shown a decrease of 95% in healthcare associated infections (HAI'S) of acinetobacter spp in hospital environment
- Used in disaster response to eliminate mold and mildew from flood damage
- University and government sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores

PART #	CONTENTS AMOUNT
82245	5 gal. Pail
82246*	15 gal. Drum
82247*	55 gal. Drum
82248*	261 gal. Tote

* - Shipping times vary due to availability. Contact your sales rep for more information



CLEANING DETERGENTS

SIMPSON® pressure washer cleaners enhance performance with heavy-duty, biodegradable formulas, cutting grease, removing stains, and tackling mold/mildew.

FOR USE ON MULTIPLE SURFACES

- Industrial sites & exterior surfaces
- Tough stains on brick, siding & concrete
- Commercial equipment & vehicle fleet
- Grease & grime
- Decks, fences, patio, vehicles, bikes, RVs, and outdoor furniture

PART #	USE	CONTENTS AMOUNT
88283	Natural Green Formula	1 gal.
88281	Multi-Purpose	1 gal.
88282	Heavy-Duty	1 gal.

The Green Formula is a safe, eco-friendly, and biodegradable cleaning solution, free from harsh chemicals.



HEAVY-DUTY DETERGENT PACS

SIMPSON® heavy-duty detergent pods are safe to use with all pressure washers and can be used on multiple surfaces.

PART #	CONTENTS AMOUNT
80597	10 Single-use Pacs



★ COMING SOON



PREMIUM PUMPS & UNLOADER KITS

AAA® INDUSTRIAL TRIPLEX PUMP

SIMPSON® offers AAA® Industrial Triplex Pumps, that contain premium seals, high-strength bearings, and corrosion-resistant materials that are made to provide a long service life. Many models feature technologies such as Easy Start and PowerBoost®, making AAA pumps powerful and easy to use.

AAA® PUMP KITS INCLUDE

- Mounting hardware (nuts & bolts)
- Crankshaft key
- Chemical siphon hose w/filter

LIMITED WARRANTY

90066, 90067, 90068	7yr
90038, 90039, 90034 90036, 90037, 90058, 90057, 90056, 90066, 90068	5yr
80362, 80361, 80404, 80405	90 days



90039



90058



90037



90067

AAA® PUMP KITS

PART #	PRESSURE	FLOW	MANIFOLD	UNLOADER	SHAFT SIZE	SPEED	OUTLET
90036	3200 PSI	2.8 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90037	3700 PSI	2.5 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90038	3800 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90039	4000 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90034	4400 PSI	4.0 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90056	3000 PSI	3.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90058	3300 PSI	3.2 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90057	3500 PSI	4.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC

AAA® G SERIES

PART #	PRESSURE	FLOW	MANIFOLD	HP/KW	SHAFT SIZE	SPEED	WEIGHT
90066	4000 PSI	3.5 GPM	Brass	9.8/7.3	24mm Solid	1750 RPM	17 lbs.
90067	4000 PSI	4.0 GPM	Brass	11.1/8.8	24mm Solid	1750 RPM	17 lbs.
90068	4000 PSI	4.4 GPM	Brass	11.1/8.3	24mm Solid	1750 RPM	17 lbs.

AAA® PUMP UNLOADERS

PART #	PRESSURE	FLOW	MATERIAL	THREADING	EASY START VALVE	MAX TEMPERATURE
80362	3000 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80361	4500 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80404	5500 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80405	6500 PSI	12 GPM	Stainless Steel	3/8" FNPT Inlet/Outlet	Yes	212° F



THERMAL RELIEF VALVE (TRV)

PART #: 80290
 RATED TEMP: 140° F
 THREAD CONNECT: 1/4" MNPT



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- HIGHER PRESSURE AT THE NOZZLE
- GREATER IMPACT AND CLEANING PERFORMANCE



PROFESSIONAL ENGINES



CRX® single-cylinder professional engines deliver reliable, consistent power for any outdoor application. Engineered for performance and durability, they feature carefully selected components to tackle every job. Trusted by DIYers and pros alike, CRX engines embody innovation and dependability, ensuring your equipment is ready whenever you need it.



ALL UNITS:

- PTO Shaft Rotation:** Counterclockwise
- Ignition System:** Transistor magneto
- Adjustable Throttle:** Yes
- Low-oil Shutdown:** Standard
- Lubrication System:** Splash
- Fuel Delivery System:** Carburetor naturally aspirated
- Evaporative Emissions:** 49-State/EPA-Compliant. Not for sale in the state of California.

LIMITED WARRANTY

All Units 3yr Commercial

ENGINE SERIES	CRX® 165*	CRX® 210*	CRX® 225*	CRX® 275*	CRX® 340*
DISPLACEMENT	163cc	208cc	224cc	272cc	338cc
NET POWER	3.2 kW @ 3600 RPM	4.3 kW @ 3600 RPM	4.5 kW @ 3600 RPM	5.8 kW @ 3600 RPM	7.2 kW @ 3600 RPM
NET TORQUE	10 Nm @ 2600 RPM	11.5 Nm @ 2600 RPM	12.5 Nm @ 2800 RPM	15.5 Nm @ 3000 RPM	21 Nm @ 2600 RPM
ALTERNATOR OUTPUT	N/A	N/A	12V 9A – 108W (Optional)	12V 9A – 108W (Optional)	12V 9A – 108W (Optional)
STARTING SYSTEM	Recoil	Recoil	Recoil/Key-start (Optional)	Recoil/Key-start (Optional)	Recoil/Key-start (Optional)
AIR CLEANER	Dual Element	Dual Element	Dual Element	Dual Element	Dual Element
FUEL TANK CAPACITY	0.7 gal.	0.7 gal.	0.7 gal.	0.7 gal.	1.6 gal.
PTO DIAMETER	3/4" (19.05mm)	3/4" (19.05mm)	3/4" (19.05mm)	1" (25.4 mm)	1" (25.4 mm)
PTO FLANGE TYPE	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange B
ENGINE DRY WEIGHT	33 lbs.	33 lbs.	33 lbs.	42 lbs.	70 lbs.
ENGINE OVERALL DIMENSIONS	L 15" x W 13" x H 14"	L 15" x W 13" x H 14"	L 15" x W 13" x H 14"	L 14" x W 16" x H 16"	L 19" x W 17" x H 20"

ENGINE SERIES	CRX® 420*	CRX® 680*	CRX® 750*	CRX® 1000*
DISPLACEMENT	420cc	679cc	750cc	999cc
NET POWER	9 kW @ 3600 RPM	14.5 kW @ 3600 RPM	16 kW @ 3600 RPM	24 kW @ 3600 RPM
NET TORQUE	27 Nm @ 2600 RPM	42.0 Nm @ 2600 RPM	47 Nm @ 3000 RPM	71 Nm @ 2800 RPM
ALTERNATOR OUTPUT	12V 20A – 240W (Optional)	12V 20A – 240W	12V 20A – 240W	12V 20A – 240W
STARTING SYSTEM	Recoil/Key-start (Optional)	Key-start	Key-start	Key-start
AIR CLEANER	Dual Element	Dual Element	Dual Element	Cyclonic
FUEL TANK CAPACITY	1.6 gal.	N/A	N/A	N/A
PTO DIAMETER	1" (25.4 mm)	1" (25.4 mm)	1" (25.4 mm)	1-1/8" (28.6mm) 1-7/16" (36.5mm) (Options)
PTO FLANGE TYPE	SAE J609 Flange B	SAE J609 Flange B/C	SAE J609 Flange B/C	SAE J609 Flange B/C
ENGINE DRY WEIGHT	74 lbs.	96 lbs.	96 lbs.	119 lbs.
ENGINE OVERALL DIMENSIONS	L 17" x W 20" x H 20"	L 20" x W 20" x H 19"	L 20" x W 20" x H 19"	L 23" x W 20" x H 21"



LOW OIL SHUTDOWN

The Low-oil Shutdown (LOS) feature, an internal oil level sensor, automatically halts the engine when oil levels are insufficient for safe operation, preventing engine damage. This indicates that the oil needs to be refilled, ensuring optimal engine performance.

For more information, please contact your sales representative.

DUAL WASH PRO SERIES – COLD WATER

AVAILABLE Q2 2025

Effortlessly transition between soft washing and pressure washing with a plug-and-play design—no wires, batteries, or electronics needed. Built with chemical-resistant seals and stainless-steel fittings, it offers exceptional durability and corrosion resistance. Streamline your workflow by replacing multiple machines with one versatile solution, delivering optimal cleaning performance while saving water.

LIMITED WARRANTY

- | | | |
|------------------|--------------------------|--------------------------------|
| All Units | • 10yr Baseplate | • 3yr Commercial HONDA® Engine |
| | • 5yr Pump | • 5yr Commercial CRX® Engine |
| | • Lifetime Pump Manifold | |

FEATURES

- Comet TW-D triplex pump with a stainless steel or nickel-plated manifold and long-life, chemical-resistant HP seals, including SH
- Stainless steel unloaders – 6500 PSI
- Stainless steel fittings and couplers
- Stainless steel heavy-duty 3-way ball valve for simple cleaning-mode control
- 2:1 gearbox
- Welded anodized aluminum base plate
- Always full flow
- Plug-n-play hookup
- Pressure relief valve
- Thermal relief valve
- Soft wash bypass for remote tank applications
- Patent pending



MODEL #	PART #	HP PRESSURE	SW PRESSURE	FLOW HP/SW	ENGINE	PUMP DRIVE	MANIFOLD
DWP3080133ESSM ¹	65434	3000 PSI	300 PSI	8 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3080133ENPM ¹	65438	3000 PSI	300 PSI	8 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP3080233ESSM ¹	65437	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3080233ENPM ¹	65441	3000 PSI	300 PSI	8 GPM	HONDA® iGX700* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP3010133ESSM ¹	65436	3000 PSI	300 PSI	10 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP3010133ENPM ¹	65440	3000 PSI	300 PSI	10 GPM	CRX® 680* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass
DWP4080133ESSM ¹	65435	4000 PSI	300 PSI	8 GPM	CRX® 750* w/Key-start	COMET, TW-D Gear	Stainless Steel
DWP4080133ENPM ¹	65439	4000 PSI	300 PSI	8 GPM	CRX® 750* w/Key-start	COMET, TW-D Gear	Nickel-plated Brass

OPTIONAL ACCESSORIES (sold separately and available upon order)

PART #	DESCRIPTION
80630	50' Soft Wash Hose
80631	Wash Down Gun
80634	8.0 GPM Chemical Injector Kit
80635	10.0 GPM Chemical Injector Kit
80633	Stainless-steel Quick Coupler Kit • Includes socket and plug connections

BASEPLATE

- Aircraft-Grade Aluminum Frame**
- Light weight and corrosion resistant
 - Forklift slots
 - Rubber vibration dampers

ENGINE LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
CRX® 750	750cc
HONDA® iGX700	688cc

DIMENSIONS & WEIGHTS

All units L 156" x W 68" x H 62" | 254 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

For more information on how to order, please contact your sales representative.

PATRIOT SERIES - HOT WATER

INDUSTRIAL

The Patriot, designed for versatility, offers both portability and stationary use. It is engineered to deliver a superior clean tailored to your needs. The units are equipped with extended fuel tanks

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, and 40°
- Engine oil 10W-30

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- V-twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion-resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw generator with one 120V duplex outlet
- 120V burner system
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil



65013



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DPT3080251EAC1 ¹	65013	3000 PSI	8.0 GPM	HONDA® GX690* w/Key-start	General Pump® Belt	15 gal.	15 gal.	1050 lbs.
DPT3080151EAC1 ¹	65184	3000 PSI	8.0 GPM	CRX® 680* w/Key-start	General Pump® Belt	15 gal.	15 gal.	1050 lbs.
DPT3080241EAC1 ¹	65366	3000 PSI	8.0 GPM	Vanguard® 23HP* w/Key-start	UDOR® Belt	15 gal.	15 gal.	1050 lbs.
DPT3080141EAC1 ¹	65367	3000 PSI	8.0 GPM	CRX® 750* w/Key-start	UDOR® Belt	15 gal.	15 gal.	1050 lbs.
DPT3080341EAC ¹	65368	3000 PSI	8.0 GPM	HONDA® GX690* w/Key-start	UDOR® Belt	15 gal.	15 gal.	1050 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
CRX® 750	750cc
HONDA® GX690	688cc
VANGUARD® 23HP	627cc

DIMENSIONS

All Units L 47" x W 43" x H 39"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

COBALT SERIES - HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

Take on the toughest cleaning jobs with the Cobalt series. Built with a robust twin-cylinder engine, it delivers dependable power that gets the job done. When turned on the diesel-fired heating system provides up to a 120°F heat rise, helping tackle even the toughest tasks with ease.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Engine oil 10W-30
- Trigger gun
- Downstream injector

LIMITED WARRANTY

ALL UNITS 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- V-twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion-resistant stainless-steel coil cover
- Isolated pump & engine plate with vibration dampeners
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil



65002



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DCT3555251EDC1 ¹	65002	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-start	General Pump® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT3555151E ¹	65144	3500 PSI	5.5 GPM	CRX® 680* w/Key-start	General Pump® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT3555341EDC1 ¹	65297	3500 PSI	5.5 GPM	Vanguard® 23HP* w/Key-start	UDOR® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT3555241EDC1 ¹	65298	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-start	UDOR® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT3555141EDC1 ¹	65351	3500 PSI	5.5 GPM	CRX® 680* w/Key-start	UDOR® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT4055151E ¹	65158	4000 PSI	5.0 GPM	CRX® 680* w/Key-start	General Pump® Belt	7.5 gal.	7.5 gal.	613 lbs.
DCT4050241EDC1 ¹	65299	4000 PSI	5.0 GPM	HONDA® GX690* w/Key-start	UDOR® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT4050341EDC1 ¹	65350	4000 PSI	5.0 GPM	Vanguard® 23HP* w/Key-start	UDOR® Belt	7.5 gal.	7.5 gal.	670 lbs.
DCT4050141EDC1 ¹	65352	4000 PSI	5.0 GPM	CRX® 680* w/Key-start	UDOR Belt	7.5 gal.	7.5 gal.	670 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW-OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 680	679cc
VANGUARD® 570cc	570cc
HONDA® GX690	688cc

DIMENSIONS

All Units L 42" x W 40" x H 38"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

STREAMLINER SERIES - HOT WATER

INDUSTRIAL

This potent mobile washing system is ingeniously designed to be compact, allowing it to comfortably fit within the confines of a transit van or truck bed, and effortlessly pass through a 36" doorway.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, and 40°
- Engine oil 10W-30
- Downstream injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- CRX®, HONDA®, VANGUARD® key-start engines (battery not included)
- Burner on/off rocker switch and hour meter
- High-temperature safety switch
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw generator with two 120V outlets
- 120V burner system
- Wheel brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil
- Large-capacity fuel tank



65016



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DSL4040253EDC1 ¹	65016	4000 PSI	4.0 GPM	HONDA® GX390* w/Key-start	General Pump® Gear	5.0 gal.	10.0 gal.	450 lbs.
DSL4040242EDC1 ¹	65361	4000 PSI	4.0 GPM	HONDA® GX390* w/Key-start	UDOR® Direct	5.0 gal.	10.0 gal.	450 lbs.
DSL4040342EDC1 ^{1**}	65362	4000 PSI	4.0 GPM	VANGUARD® 470cc* w/Key-start	UDOR® Direct	5.0 gal.	10.0 gal.	470 lbs.
DSL4040142EDC1 ¹	65363	4000 PSI	4.0 GPM	CRX® 420* w/Key-start	UDOR® Direct	5.0 gal.	10.0 gal.	450 lbs.
DSL4040143EDC1 ¹	65364	4000 PSI	4.0 GPM	CRX® 420* w/Key-start	UDOR® Gear	5.0 gal.	10.0 gal.	450 lbs.
DSL4040343EDC1 ^{1**}	65365	4000 PSI	4.0 GPM	VANGUARD® 470cc* w/Key-start	UDOR® Gear	5.0 gal.	10.0 gal.	470 lbs.

PUMPS

General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT
CRX® 420	420cc
HONDA® GX390	389cc
VANGUARD® 470cc	470cc

DIMENSIONS

All Units L 50" x W 32" x H 52"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

** - Battery not included.

ELIMINATOR SERIES - HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, and 40°
- High-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- High-pressure soap with metering valve
- Roll-down doors with lock
- Slide out motor pump tray
- Time delay shut-down
- Remote box ready wired
- Float tank
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 vertical coil

OPTIONAL ACCESSORY (sold separately & available upon order)

PART #	DESCRIPTION
7100283	Draft diverter
7110785	Auto start/stop shut-off
7110510	Wired NEMA 4X remote operating station



65030



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU	PUMP DRIVE	FUEL TYPE	PRODUCT WEIGHT
DNG2040031B	65030	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	380,000	UDOR Belt	Natural Gas	807 lbs.
DNG2040031C	65031	2000 PSI	4.0 GPM	5HP 230V 3Ø 12.6A	380,000	UDOR Belt	Natural Gas	844 lbs.
DNG2040031D	65032	2000 PSI	4.0 GPM	5HP 460V 3Ø 6.3A	380,000	UDOR Belt	Natural Gas	806 lbs.
DLP2040031B	65033	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	450,000	UDOR Belt	Liquid Propane	800 lbs.
DLP2040031C	65034	2000 PSI	4.0 GPM	5HP 230V 3Ø 12.6A	450,000	UDOR Belt	Liquid Propane	813 lbs.
DLP2040031D	65035	2000 PSI	4.0 GPM	5HP 460V 3Ø 6.3A	450,000	UDOR Belt	Liquid Propane	806 lbs.
DNG3040031B	65036	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	380,000	UDOR Belt	Natural Gas	834 lbs.
DNG3040031C	65037	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19.8A	380,000	UDOR Belt	Natural Gas	794 lbs.
DNG3040031D	65038	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.9A	380,000	UDOR Belt	Natural Gas	804 lbs.
DLP3040031B	65039	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	450,000	UDOR Belt	Liquid Propane	854 lbs.
DLP3040031C	65040	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19.8A	450,000	UDOR Belt	Liquid Propane	820 lbs.
DLP304031D	65041	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.9A	450,000	UDOR Belt	Liquid Propane	806 lbs.
DNG3050031B	65042	3000 PSI	5.0 GPM	10HP 230V 1Ø 39A	380,000	UDOR Belt	Natural Gas	839 lbs.
DNG3050031C	65043	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	380,000	UDOR Belt	Natural Gas	800 lbs.
DNG3050031D	65044	3000 PSI	5.0 GPM	10HP 460V 3Ø 12.5A	380,000	UDOR Belt	Natural Gas	810 lbs.
DLP3050031B	65045	3000 PSI	5.0 GPM	10HP 230V 1Ø 39A	450,000	UDOR Belt	Liquid Propane	820 lbs.
DLP3050031C	65046	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	450,000	UDOR Belt	Liquid Propane	800 lbs.
DLP3050031D	65047	3000 PSI	5.0 GPM	10HP 460V 3Ø 12.5A	450,000	UDOR Belt	Liquid Propane	816 lbs.
DNG3080031C	65048	3000 PSI	8.0 GPM	15HP 230V 3Ø 35A	380,000	UDOR Belt	Natural Gas	800 lbs.
DNG3080031D	65049	3000 PSI	8.0 GPM	15HP 460V 3Ø 17.5A	380,000	UDOR Belt	Natural Gas	760 lbs.
DLP3080031C	65050	3000 PSI	8.0 GPM	15HP 230V 3Ø 35A	450,000	UDOR Belt	Liquid Propane	814 lbs.
DLP3080031D	65051	3000 PSI	8.0 GPM	15HP 460V 3Ø 17.5A	450,000	UDOR Belt	Liquid Propane	820 lbs.

PUMPS

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Powder-coated for corrosion resistance
- Corrosion resistant, stainless steel vented panels
- Wall-mount

HOSE

- 3/8" x 50' steel-braided Armor Hose®

DIMENSIONS

65030, 65031, 65032, 65033, 65034, 65035, 65036, 65037, 65038, 65039, 65040, 65041, 65042, 65043, 65044, 65045, 65046, 65047, 65048, 65049, 65050, 65051

L 30" x W 50" x H 53"

ELIMINATOR SERIES - HOT WATER (CONT.)

INDUSTRIAL

AVAILABLE Q2 2025

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, and 40°
- High-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- High-pressure soap with metering valve
- Roll-down doors with lock
- Slide out motor pump tray
- Time delay shut-down
- Remote box ready wired
- Float tank
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 vertical coil

OPTIONAL ACCESSORY (sold separately & available upon order)

PART #	DESCRIPTION
7100283	Draft diverter
7110785	Auto start/stop shut-off
7110510	Wired NEMA 4X remote operating station



65184



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU	PUMP DRIVE	FUEL TYPE	PRODUCT WEIGHT
ELM3040041BNG	65184	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 32A	380,000	UDOR Belt	Natural Gas	860 lbs.
ELM3050041CNG	65190	3000 PSI	5.0 GPM	10HP 230V 3Ø 30A	380,000	UDOR Belt	Natural Gas	860 lbs.
ELM3050041DNG	65191	3000 PSI	5.0 GPM	10HP 460V 3Ø 15A	380,000	UDOR Belt	Natural Gas	860 lbs.
ELM3080041CNG	65246	3000 PSI	8.0 GPM	15HP 230V 3Ø 42A	750,000	UDOR Belt	Natural Gas	1660 lbs.
ELM3080041DNG	65247	3000 PSI	8.0 GPM	15HP 460V 3Ø 21A	750,000	UDOR Belt	Natural Gas	1660 lbs.
ELM3080041DLP	65286	3000 PSI	8.0 GPM	15HP 460V 3Ø 21A	760,000	UDOR Belt	Liquid Propane	1660 lbs.
ELM3010041DNG	65283	3000 PSI	10.0 GPM	20HP 460V 3Ø 28A	750,000	UDOR Belt	Natural Gas	1660 lbs.

PUMPS

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Powder-coated for corrosion resistance
- Corrosion resistant, stainless steel vented panels
- Wall-mount

HOSE

- 3/8" x 50' steel-braided Armor Hose®

DIMENSIONS

65184, 65190, 65191	L 52" x W 36" x H 51"
65246, 65247, 65286, 65283	L 64" x W 36" x H 61"

VERSA SERIES – HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Versa series, available in either powder-coated or stainless steel frames, stands as a dependable option for a wide range of cleaning equipment needs. Its superior quality and unique design set this horizontal coil electric cleaning system apart, making it the best in its class.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, and 40°
- Up stream low-pressure soap injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with burner on/off rocker switch, and hour meter, time delay-shut off
- Large capacity diesel fuel tank
- Horizontal heat exchanger with stainless steel housing
- 120V or 230V burner
- Burner fuels: No. 1/No. 2 diesel or kerosene

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7110785	Auto start/stop shut off



65375



MODEL #	PART #	DESCRIPTION	PRESSURE	FLOW	MOTOR	PUMP DRIVE	DIESEL TANK	PRODUCT WEIGHT
DVST2.525041AAC1	65381	Super Steamer	250 PSI	2.5 GPM	0.75HP 120V 1Ø 8.4A	UDOR Belt	4.4 gal.	600 lbs.
DVSTSS2.525041AAC1	65382	Super Steamer	250 PSI	2.5 GPM	0.75HP 120V 1Ø 8.4A	UDOR Belt	4.4 gal.	600 lbs.
DV2040041BAC2	65375	High-Pressure	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Belt	4.4 gal.	690 lbs.
DVSS2040041BAC2	65376	High-Pressure	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Belt	4.4 gal.	690 lbs.
DV3040041BAC2	65377	High-Pressure	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 29A	UDOR Belt	4.4 gal.	690 lbs.
DV3040041CAC2	65378	High-Pressure	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19A	UDOR Belt	4.4 gal.	690 lbs.
DVSS3040041BAC2	65379	High-Pressure	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 29A	UDOR Belt	4.4 gal.	690 lbs.
DVSS3040041CAC2	65380	High-Pressure	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19A	UDOR Belt	4.4 gal.	690 lbs.

PUMP

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated frame and panels for corrosion resistance (65381, 65375, 65377, 65378)
- Stainless steel frame and panels (65382, 65376, 65379, 65380)

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

WHEELS

- 13" Premium pneumatic

DIMENSIONS

All Units L 35" x W 30" x H 43"

EQUALIZER SERIES – HOT WATER

INDUSTRIAL

The Equalizer series, offered in both gas and electric models, is designed to accommodate a diverse range of cleaning applications. This comprehensive vertical coil pressure washing system boasts a broad four-wheel stance, enhancing both mobility and versatility, making it a standout choice for your cleaning needs.

UNIT INCLUDES

- Hose
- Lance
- Chemical injector (65369, 65370)
- Trigger gun
- Nozzles: 15°, 25°, and 40°

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- External diesel fuel tank (4.4 gal.)
- 120V burner system
- 35' GFCI electrical cord
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 vertical coil

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7112623	Chemical injector kit (gas models)



65068



MODEL #	PART #	PRESSURE	FLOW	ENGINE/MOTOR	PUMP DRIVE	PRODUCT WEIGHT
DEZ2040041B ¹	65369	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Belt	550 lbs.
DEZ2040042B ¹	65370	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Direct	550 lbs.
DEZ3040252EDC1 ¹	65069	3000 PSI	4.0 GPM	HONDA® GX390* w/Recoil Key-start	General Pump Direct	525 lbs.
DEZ3040242EDC1 ¹	65373	3000 PSI	4.0 GPM	HONDA® GX390* w/Recoil Key-start	UDOR Direct	525 lbs.
DEZ4040142EDC1 ¹	65374	4000 PSI	4.0 GPM	CRX420* w/Key-start	UDOR Direct	525 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- 13" premium heavy-duty tires for easy mobility and vibration dampening

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	1.6 gal
HONDA® GX390	389cc	1.6 gal

DIMENSIONS

All Units L 35" x W 30" x H 43"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.

DOMINATOR SERIES – HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Dominator Series, designed with compactness and user-friendliness in mind, is a testament to high-quality components and remarkable value. This horizontal coil electric hot water pressure washer comes equipped with features like downstream chemical injection, enhancing its functionality and efficiency.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°, and soap
- Lance
- Down stream injector
- Trigger gun

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- NEMA 4X electrical enclosure with rocker switch and hour meter
- 6.75 gal diesel fuel tank
- Wheel brake system
- 35' GFCI electrical cord
- Burner fuels: No. 1/No. 2 diesel or kerosene



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	DIESEL TANK	PRODUCT WEIGHT
DDM1030042AAC1	65383	1000 PSI	3.0 GPM	2HP 120V 1Ø 16.4A	UDOR Direct	6.75 gal.	450 lbs.
DDM2040042BAC2	65384	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Direct	6.75 gal.	450 lbs.

PUMP

UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose®

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

DIMENSIONS

All Units L 31" x W 55" x H 40"

CWE SERIES – COLD WATER

INDUSTRIAL

The Delco® CWE Portable Series represents electrically powered, enclosed cabinet-style cold water washers. Each model is equipped with a belt-drive premium triplex plunger pump, featuring high-temperature seals capable of handling water temperatures up to 165° F. This series combines compact design and user-friendly operation, making it an excellent choice for your cleaning needs.

UNIT INCLUDES

- Hose
- Lance
- Trigger gun
- Nozzles: 15°, 25°, 40°, and soap
- Down stream injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- High temperature water feed, capable up to 165° F
- Automatic start/stop feature
- Built-in hour meter
- Belt driven slow speed industrial triplex pump
- Removable handle and wheels
- Burner fuels: No. 1/No. 2 diesel or kerosene

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7114012	Wall Mount Stand



65292



65171



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP DRIVE	FRAME	PRODUCT WEIGHT
DWM1330042B	65171	1300 PSI	3.0 GPM	3HP 230V 1Ø 16.9A	UDOR Direct	Wall Mount Steel	250 lbs.
DWM2040042B	65172	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Direct	Wall Mount Steel	250 lbs.
DFM2040041B	65295	2000 PSI	4.0 GPM	5HP 230V 1Ø 23A	UDOR Belt	Portable Steel	325 lbs.
DFM2010031C	65164	2000 PSI	10.0 GPM	15HP 230V 3Ø 35A	COMET Belt	Portable Steel	400 lbs.
DFM3040041D	65294	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.5A	UDOR Belt	Portable Steel	350 lbs.
DFMSS3040041D	65296	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.5A	UDOR Belt	Portable Stainless Steel	350 lbs.
DFM3050041C	65292	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	UDOR Belt	Portable Steel	385 lbs.
DFMSS3050041C	65293	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	UDOR Belt	Portable Stainless Steel	385 lbs.

PUMPS

COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass manifold
- Thermal relief valve
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

FRAMES

Wall Mount

- Powder-coated steel frame for corrosion resistance

Portable

- Compact frame for easy storage
- Powder-coated steel frame for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose®

COVER

- Steel powder-coated panel cover

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

DIMENSIONS

All units L 35" x W 31" x H 36"

MOBILE TRAILER SERIES – HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Delco® Mobile Trailer series represents self-sufficient cleaning powerhouses. These portable Mobile Trailers are ingeniously engineered to harness the power of Delco machines, providing effective cleaning solutions even in locations where water supply is scarce. This makes them an ideal choice for job sites with limited resources.



95101

UNIT INCLUDES

- Hose
- Nozzles 15°, 25°, 40°, and soap
- Lance
- Downstream injector
- Trigger gun

LIMITED WARRANTY

ALL UNITS 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- 1 – 200' high-pressure hose reel with 100' high-pressure hose
- 1 – 200' supply hose reel with 90' supply hose
- Translucent polyethylene water supply tank with easy-to-read water level indicators
- Jack with swivel wheel for easy maneuvering
- 3500 lb. axle with leaf-spring suspension for a smooth ride
- Electric brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene



POWERED by HONDA

POWERED by VANGUARD



MODEL #	PART#	PRESSURE	FLOW	ENGINE	PUMP	AXLE RATING	WATER TANK SIZE	TIRE	PRODUCT WEIGHT
DTRS23555331E ¹	95100	3500 PSI	5.5 GPM	VANGUARD® 570cc*	COMET	3500 lbs. Rated (x1)	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs.
DTRS23555251E ¹	95101	3500 PSI	5.5 GPM	HONDA® GX690* w/Recoil & Key-start	General Pump®	3500 lbs. Rated (x1)	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs.
DTRS33555331E ¹	95107	3500 PSI	5.5 GPM	VANGUARD® 570cc*	COMET	4500 lbs. Rated (x2)	525 gal. with Steel Straps and Drain Petcock	16" w/6-ply	3500 lbs.
DTRS24050251E ¹	95103	4000 PSI	5.0 GPM	HONDA® GX690* w/Recoil & Key-start	General Pump®	3500 lbs. Rated (x1)	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs.
DTRS24050331E ¹	95104	4000 PSI	5.0 GPM	VANGUARD® 570cc*	COMET	3500 lbs. Rated (x1)	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass manifold
- Ceramic-coated plunger sleeves
- External unloader with bypass hose

HOSES

- 3/8" x 100' steel-braided Armor Hose®

High-Pressure Hose Reel

- Size: 200'

Supply Hose

- Size: 5/8" x 90'

Supply Hose Reel

- Standard - 200'

NOZZLES

- Quick-connect nozzles for a variety of cleaning applications

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Lighting

- LED

Trailer Hitch Ball Size

- 2" ball coupling

ADDITIONAL FEATURES

- Equipped with 48" toolbox
- 95107 equipped with 16 gal. chemical tank

ENGINES LOW-OIL SHUTDOWN

ENGINE	DISPLACEMENT
HONDA® GX690	688cc
VANGUARD® 570cc	570cc

DIMENSIONS

95100, 95101, 95103, 95104	L 156" (includes tongue) x W 68" x H 62"
95107	L 192" (includes tongue) x W 90" x H 62"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low-oil shutdown technology. Refer to page 34 for additional information.



Driven by **PERFORMANCE™**



Disclaimer of Liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog also reserves the right to make changes to its product line at any time without notice. If misleading, or otherwise inaccurate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-833-362-7368 with any concerns.

LEARN MORE AT **SIMPSONCLEANING.COM • SIMPSONORDERS@FNA-GROUP.COM**